


REGULAR QUICK COUPLING - 1/4» INDUSTRIAL PROFILE



Female thread swivel coupler

Profile : ISO 6150B

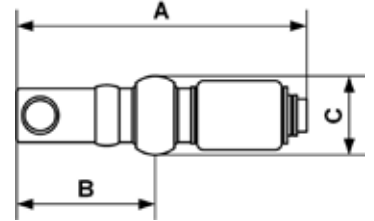

Min/max operating pressure	Flow rate at 87 psi	ID passage	Temperature min/max
0 / 174 psi	28 CFM	1/4"	5 / 158 °F

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
IRC 061201FA	NPT1/4	0,207	6.21	1.61	1.57