


## REGULAR QUICK COUPLING - 3/8" INDUSTRIAL PROFILE



Female coupler

Profile : ISO 6150B

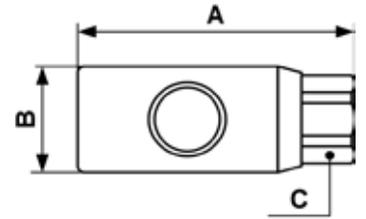

<b>Min/max operating pressure</b> 0 / 174 psi	<b>Flow rate at 87 psi</b> 69 CFM	<b>ID passage</b> 3/8"	<b>Temperature min/max</b> 5 / 158 °F
--	--------------------------------------	---------------------------	--

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
IRC 081201	NPT1/4	0,162	3.29	1.3	0.98
IRC 081202	NPT3/8	0,155	3.33	1.3	0.98
IRC 081203	NPT1/2	0,165	3.68	1.3	0.98