


27202 BLOW GUN

Metal Nozzle Blow Gun

Profile : TRUFLATE

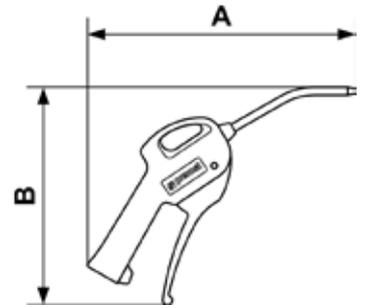

Blowing force	Dynamic pressure	Max. operating pressure	Temperature min/max
13 OZF	17.4 psi	145 psi	5 / 158 °F
4 OZF	11.6 psi		
13 OZF	18.1 psi		
9 OZF	24.7 psi		
	21.8 psi		
	24.7 psi		
	21.8 psi		

Part number	Flow rate at 87 psi (CFM)	Sound level (dBA)	Length (ft)	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)
27202 MTL	13	83		NPT1/4	0,14	7.87	6.46
27202 MTLBP3	5	73		NPT1/4	0,14	7.87	6.46
27202 MTLRT	14	83		NPT1/4	0	8,46	
27202 MB13	9	86	1.083	NPT1/4	0,02328	14.45	9.84
27202 MB20	8	86	1.641	NPT1/4	0,2	20.24	14.96
27202 MS13	9	86	1.083	NPT1/4	0,17	14.09	10.98
27202 MS20	8	86	1.641	NPT1/4	0,198	19.92	14.33