


DRAINS ELECTRONIC PROGRAMMABLE

Parts for Programmable Electronic Drain

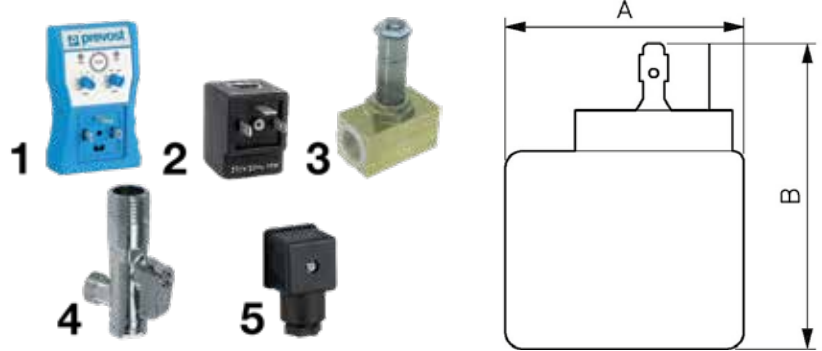

Opening duration	Opening frequency	Max. operating pressure	Temperature min/max
0,5-10 s	0,5 - 45 min Min	232 psi	35,6 / 131 °F

Part number	Male thread	Voltage (V)	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)
2. BOB 110VA		110	0,114	1.61	2.09
ELV 201	NPT1/4			3.15	1.57
ELV 202	NPT3/8			3.15	1.57
ELV 203	NPT1/2			3.15	1.81
4. COL 253252	NPT3/8		0,193	3,86	2,36
5. TEMP CONNECT		230	0,024	1.77	0.98