


PREVOS1 STAINLESS STEEL SAFETY QUICK COUPLINGS - 3/8» HIGH FLOW PROFILE



Female coupler - Stainless Steel

Profile : EUROPEAN

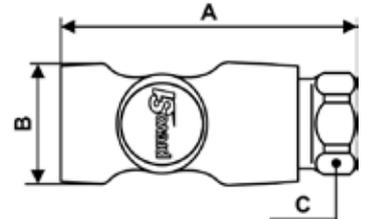

Min/max operating pressure	Flow rate at 87 psi	ID passage	Temperature min/max
29 / 174 psi	64 CFM	3/8"	5 / 158 °F

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
ESI 071101HE	G1/4	0,125	2.89	1.27	0.91
ESI 071102HE	G3/8	0,118	2.89	1.27	1.02
ESI 071103HE	G1/2	0,129	3.16	1.27	1.02