


PREVOS1 STAINLESS STEEL SAFETY QUICK COUPLINGS - 3/8» HIGH FLOW PROFILE



Male coupler - Stainless Steel

Profile : EUROPEAN

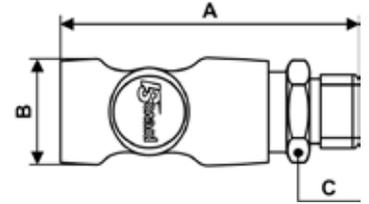

Min/max operating pressure 29 / 174 psi	Flow rate at 87 psi 64 CFM	ID passage 3/8"	Temperature min/max 5 / 158 °F
---	--------------------------------------	---------------------------	--

Part number	Male thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
ESI 071151HE	G1/4	0,129	3.2	1.27	0.91
ESI 071152HE	G3/8	0,131	3.24	1.27	1.02
ESI 071153HE	G1/2	0,137	3.32	1.27	1.02