


## PREVOS1 SAFETY QUICK COUPLINGS - 1/4» ARO 210 PROFILE



Female coupler

Profile : ARO 210

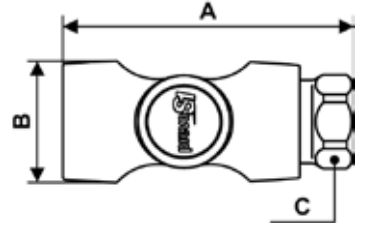

<b>Min/max operating pressure</b> 29 / 174 psi	<b>Flow rate at 87 psi</b> 28 CFM	<b>ID passage</b> 1/4"	<b>Temperature min/max</b> 5 / 158 °F
---------------------------------------------------	--------------------------------------	---------------------------	------------------------------------------

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
ASI 061201	NPT1/4	0,097	2.68	1.18	0.79
ASI 061202	NPT3/8	0,095	2.83	1.18	0.79
ASI 061203	NPT1/2	0,104	3.11	1.18	0.91