


## PREVOS1 SAFETY QUICK COUPLINGS - 1/2» HIGH FLOW PROFILE



### Female coupler

Profile : EUROPEAN

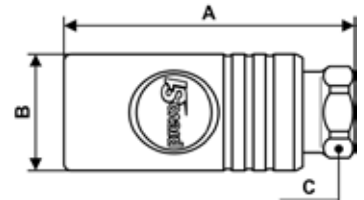

Min/max operating pressure	Flow rate at 87 psi	ID passage	Temperature min/max
29 / 174 psi	125 CFM	1/2"	5 / 158 °F

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
ESI 111202EB	NPT3/8	0,211	3.58	1.46	1.02
ESI 111203EB	NPT1/2	0,215	3.66	1.46	1.02
ESI 111204EB	NPT3/4	0,233	3.9	1.46	1.18