


# PREVOS1 SAFETY QUICK COUPLINGS - 1/2» HIGH FLOW PROFILE



## Male coupler

Profile : EUROPEAN

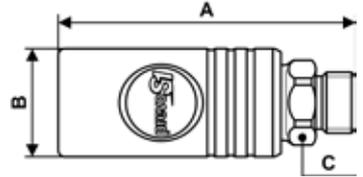

<b>Min/max operating pressure</b> 29 / 174 psi	<b>Flow rate at 87 psi</b> 125 CFM	<b>ID passage</b> 1/2"	<b>Temperature min/max</b> 5 / 158 °F
---	---------------------------------------	---------------------------	--

Part number	Male thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
ESI 111252EB	NPT3/8	0,233	4.06	1.46	1.02
ESI 111253EB	NPT1/2	0,237	4.21	1.46	1.02
ESI 111254EB	NPT3/4	0,266	4.29	1.46	1.18