


## PREVOS1 SAFETY QUICK COUPLINGS - 1/2» HIGH FLOW PROFILE



### Female coupler

Profile : EUROPEAN

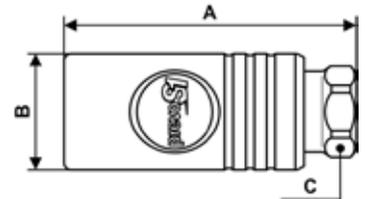

<b>Min/max operating pressure</b> 29 / 232 psi	<b>Flow rate at 87 psi</b> 125 CFM	<b>ID passage</b> 1/2"	<b>Temperature min/max</b> 5 / 158 °F
---	---------------------------------------	---------------------------	--

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
ESI 111202	NPT3/8	0,469	3.56	1.46	1.02
ESI 111203	NPT1/2	0,466	3.65	1.46	1.02
ESI 111204	NPT3/4	0,483	3.9	1.46	1.18