


PREVOS1 SAFETY QUICK COUPLINGS - 1/2» HIGH FLOW PROFILE



Male coupler

Profile : EUROPEAN

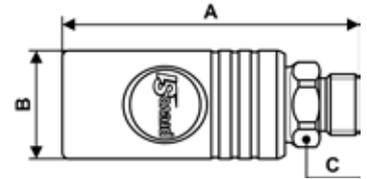

Min/max operating pressure 29 / 232 psi	Flow rate at 87 psi 125 CFM	ID passage 1/2"	Temperature min/max 5 / 158 °F
---	---------------------------------------	---------------------------	--

Part number	Male thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
ESI 111252	NPT3/8	0,485	4.06	1.46	1.02
ESI 111253	NPT1/2	0,49	4.21	1.46	1.02
ESI 111254	NPT3/4	0,522	4.29	1.46	1.18