


PREVOS1 SAFETY QUICK COUPLINGS 3/8» - HIGH FLOW PROFILE



Female coupler

Profile : EUROPEAN

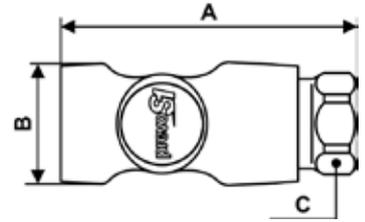

Min/max operating pressure 29 / 174 psi	Flow rate at 87 psi 64 CFM	ID passage 3/8"	Temperature min/max 5 / 158 °F
---	--------------------------------------	---------------------------	--

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
ESI 071201	NPT1/4	0,116	2.77	1.27	0.91
ESI 071202	NPT3/8	0,114	2.83	1.27	0.91