


## PREVOS1 SAFETY QUICK COUPLINGS 3/8» - HIGH FLOW PROFILE



### Male coupler

Profile : EUROPEAN

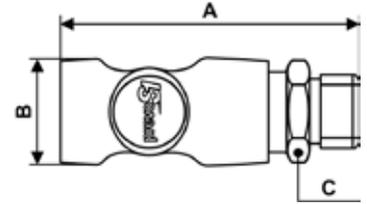

<b>Min/max operating pressure</b> 29 / 174 psi	<b>Flow rate at 87 psi</b> 64 CFM	<b>ID passage</b> 3/8"	<b>Temperature min/max</b> 5 / 158 °F
---	--------------------------------------	---------------------------	--

Part number	Male thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
ESI 071251	NPT1/4	0,13	3.3	1.27	0.91
ESI 071252	NPT3/8	0,134	3.3	1.27	0.91
ESI 071253	NPT1/2	0,145	3.46	1.27	0.91