


## PREVOS1 SAFETY QUICK COUPLINGS - 3/8» INDUSTRIAL PROFILE



### Female coupler

Profile : ISO 6150B

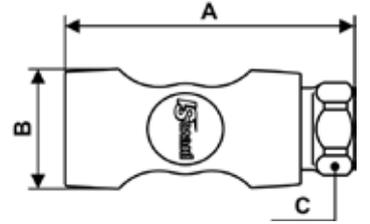

<b>Min/max operating pressure</b> 29 / 174 psi	<b>Flow rate at 87 psi</b> 72 CFM	<b>ID passage</b> 3/8"	<b>Temperature min/max</b> 5 / 158 °F
---	--------------------------------------	---------------------------	--

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
ISI 081201	NPT1/4	0,142	3.13	1.3	0.91
ISI 081202	NPT3/8	0,139	3.19	1.3	0.91
ISI 081203	NPT1/2	0,142	3.54	1.3	0.91