


## PREVOS1 SAFETY QUICK COUPLINGS - 1/2» PROFILE



### Male coupler

Profile : ISO 6150B

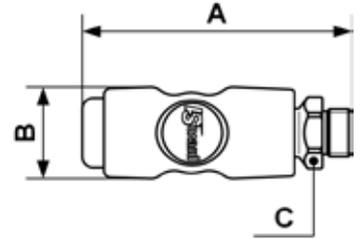

<b>Min/max operating pressure</b> 29 / 174 psi	<b>Flow rate at 87 psi</b> 130 CFM	<b>ID passage</b> 1/2"	<b>Temperature min/max</b> 5 / 158 °F
---------------------------------------------------	---------------------------------------	---------------------------	------------------------------------------

Part number	Male thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
ISI 111252EB	NPT3/8	0,244	4.57	1.46	1.02
ISI 111253EB	NPT1/2	0,248	4.57	1.46	1.02
ISI 111254EB	NPT3/4	0,278	4.65	1.46	1.18