


## PREVOS1 SAFETY QUICK COUPLINGS - 1/4» AUTOMOTIVE PROFILE



### Female coupler

Profile : TRUFLATE

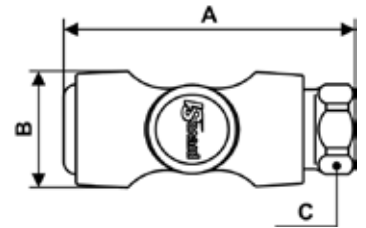

<b>Min/max operating pressure</b> 29 / 174 psi	<b>Flow rate at 87 psi</b> 29 CFM	<b>ID passage</b> 1/4"	<b>Temperature min/max</b> 5 / 158 °F
---	--------------------------------------	---------------------------	--

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
<b>USI 061201</b>	NPT1/4	0,102	2.8	1.18	0.79
<b>USI 061202</b>	NPT3/8	0,1	2.95	1.18	0.79
<b>USI 061203</b>	NPT1/2	0,109	3.23	1.18	0.91