


PREVOS1 SAFETY QUICK COUPLINGS - 1/4» AUTOMOTIVE PROFILE



Male coupler

Profile : TRUFLATE

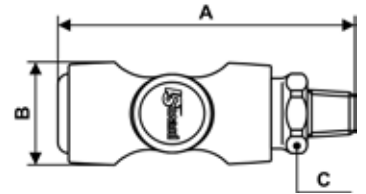

Min/max operating pressure 29 / 174 psi	Flow rate at 87 psi 29 CFM	ID passage 1/4"	Temperature min/max 5 / 158 °F
---------------------------------------------------	--------------------------------------	---------------------------	------------------------------------------

Part number	Male thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
USI 061251	NPT1/4	0,111	3.23	1.18	0.79
USI 061252	NPT3/8	0,114	3.23	1.18	0.79
USI 061253	NPT1/2	0,134	3.46	1.18	0.91