


PREVOS1 SAFETY QUICK COUPLINGS - 1/4» AUTOMOTIVE PROFILE



Threaded swivel coupler

Profile : TRUFLATE

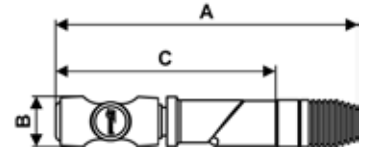

Min/max operating pressure 29 / 174 psi	Flow rate at 87 psi 29 CFM	ID passage 1/4"	Temperature min/max 5 / 158 °F
---	--------------------------------------	---------------------------	--

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
USI 061201SW	NPT1/4	0,173	2.8	1.18	0.79
USI 061202SW	NPT3/8	0,169	6.89	1.18	5.05