


PREVOS1 SAFETY QUICK COUPLINGS - 3/8» AUTOMOTIVE PROFILE



Female coupler

Profile : TRUFLATE

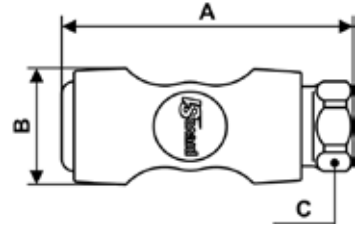

Min/max operating pressure	Flow rate at 87 psi	ID passage	Temperature min/max
29 / 174 psi	72 CFM	3/8"	5 / 158 °F

Part number	Female thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
USI 081201	NPT1/4	0,142	3.24	1.3	0.91
USI 081202	NPT3/8	0,14	3.24	1.3	0.91
USI 081203	NPT1/2	0,143	3.6	1.3	0.91