


PREVOS1 SAFETY QUICK COUPLINGS - 3/8» AUTOMOTIVE PROFILE



Male coupler

Profile : TRUFLATE

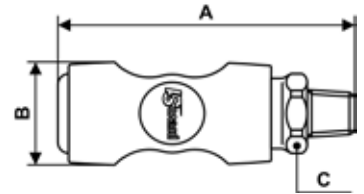

Min/max operating pressure 29 / 174 psi	Flow rate at 87 psi 72 CFM	ID passage 3/8"	Temperature min/max 5 / 158 °F
---	--------------------------------------	---------------------------	--

Part number	Male thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
USI 081251	NPT1/4	0,157	3.72	1.3	0.91
USI 081252	NPT3/8	0,159	3.72	1.3	0.91
USI 081253	NPT1/2	0,171	3.87	1.3	0.91