


PREVOS1 SAFETY QUICK COUPLINGS - 1/2» AUTOMOTIVE PROFILE



Male coupler

Profile : TRUFLATE

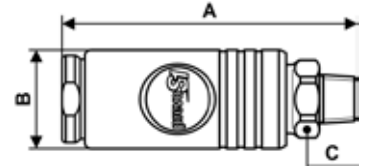

Min/max operating pressure	Flow rate at 87 psi	ID passage	Temperature min/max
29 / 174 psi	105 CFM	1/2"	5 / 158 °F

Part number	Male thread	Net weight (Kg)	Dim. A (inch)	Dim. B (inch)	Dim. C (inch)
USI 111252EB	NPT3/8	0,238	4.41	1.46	1.02
USI 111253EB	NPT1/2	0,242	4.57	1.46	1.02
USI 111254EB	NPT3/4	0,278	4.65	1.46	1.18