


PREVOS1 SAFETY QUICK COUPLINGS - 1/2» AUTOMOTIVE PROFILE



Female coupler

Profile : TRUFLATE

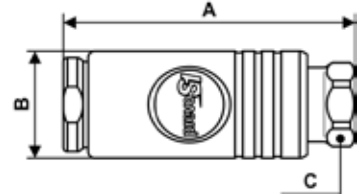

| | | | |
|---------------------------------------------------|---------------------------------------|---------------------------|------------------------------------------|
| Min/max operating pressure 29 / 232 psi | Flow rate at 87 psi 105 CFM | ID passage 1/2" | Temperature min/max 5 / 158 °F |
|---------------------------------------------------|---------------------------------------|---------------------------|------------------------------------------|

| Part number | Female thread | Net weight (Kg) | Dim. A (inch) | Dim. B (inch) | Dim. C (inch) |
|-------------------|---------------|-----------------|---------------|---------------|---------------|
| USI 111202 | NPT3/8 | 0,492 | 3.92 | 1.46 | 1.02 |
| USI 111203 | NPT1/2 | 0,489 | 4.02 | 1.46 | 1.02 |
| USI 111204 | NPT3/4 | 0,507 | 4.25 | 1.46 | 1.18 |