


## PREVOS1 SAFETY QUICK COUPLINGS - 1/2» AUTOMOTIVE PROFILE



### Male coupler

Profile : TRUFLATE

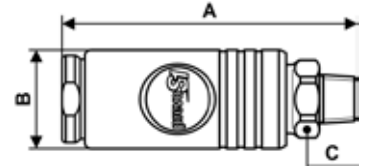

|   |                                       |                           |  |
|---|---------------------------------------|---------------------------|--|
| <b>Min/max operating pressure</b><br>29 / 232 psi | <b>Flow rate at 87 psi</b><br>105 CFM | <b>ID passage</b><br>1/2" | <b>Temperature min/max</b><br>5 / 158 °F |
|---|---------------------------------------|---------------------------|--|

| Part number       | Male thread | Net weight (Kg) | Dim. A (inch) | Dim. B (inch) | Dim. C (inch) |
|-------------------|-------------|-----------------|---------------|---------------|---------------|
| <b>USI 111252</b> | NPT3/8      | 0,508           | 4.41          | 1.46          | 1.02          |
| <b>USI 111253</b> | NPT1/2      | 0,51            | 4.57          | 1.46          | 1.02          |
| <b>USI 111254</b> | NPT3/4      | 0,543           | 4.65          | 1.46          | 1.18          |