


## PPS SYSTEM 100% ALUMINIUM NETWORK

### PPS1 BFV - Tapping flange BFT with valve

The PREVOST PIPING SYSTEM's tapping flanges with ball valves are compact, lightweight and easy to install. The tapping flanges are made of aluminum. Female threaded ball valves are available in ½" and 1" size

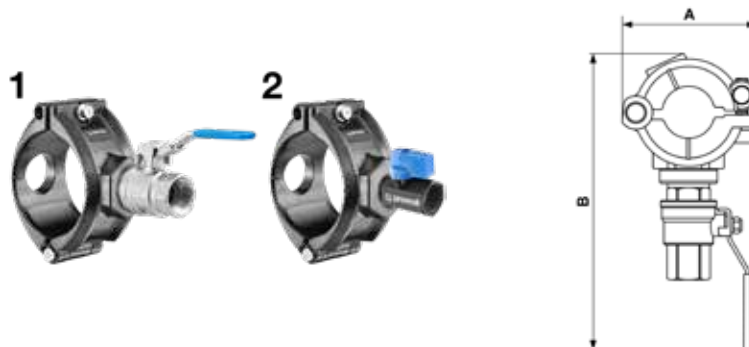

Max. operating pressure (bar)

16

Min. / Max temperature (°C)

-20 / 80

Material

Aluminium

| Part number      | Female thread |      | For pipe OD | Net weight (Kg) | Dim. A (mm) | Dim. B (mm) |
|------------------|---------------|------|-------------|-----------------|-------------|-------------|
| 2. PPS1 BFV2512  | G1/2          | G1/2 | 25          | 0.26            | 65          | 145         |
| 2. PPS1 BFV3212  | G1/2          | G1/2 | 32          | 0.5             | 65          | 145         |
| 2. PPS1 BFV4012  | G1/2          | G1/2 | 40          | 0,737           | 94          | 170         |
| 1. PPS1 BFV4034  | G1            | G1   | 40          | 1.044           | 94          | 210         |
| 2. PPS1 BFV5012  | G1/2          | G1/2 | 50          | 0.675           | 94          | 170         |
| 1. PPS1 BFV5034  | G1            | G1   | 50          | 0.985           | 94          | 210         |
| 2. PPS1 BFV6312  | G1/2          | G1/2 | 63          | 1.21            | 137         | 210         |
| 1. PPS1 BFV6334  | G1            | G1   | 63          | 1,498           | 137         | 245         |
| 2. PPS1 BFV8012  | G1/2          | G1/2 | 80          | 1.1             | 137         | 210         |
| 1. PPS1 BFV8034  | G1            | G1   | 80          | 1.398           | 137         | 245         |
| 2. PPS1 BFV10012 | G1/2          | G1/2 | 100         | 1.24            | 159         | 225         |
| 1. PPS1 BFV10034 | G1            | G1   | 100         | 1,52            | 159         | 255         |